


Object Name Substitution with Attribute Value

The Filter Properties window also permits to substitute the displayed object name by an [attribute value](#). This can be done by choosing a [type attribute](#) from the drop-down list in the **Displayed attribute** section under **Types**.

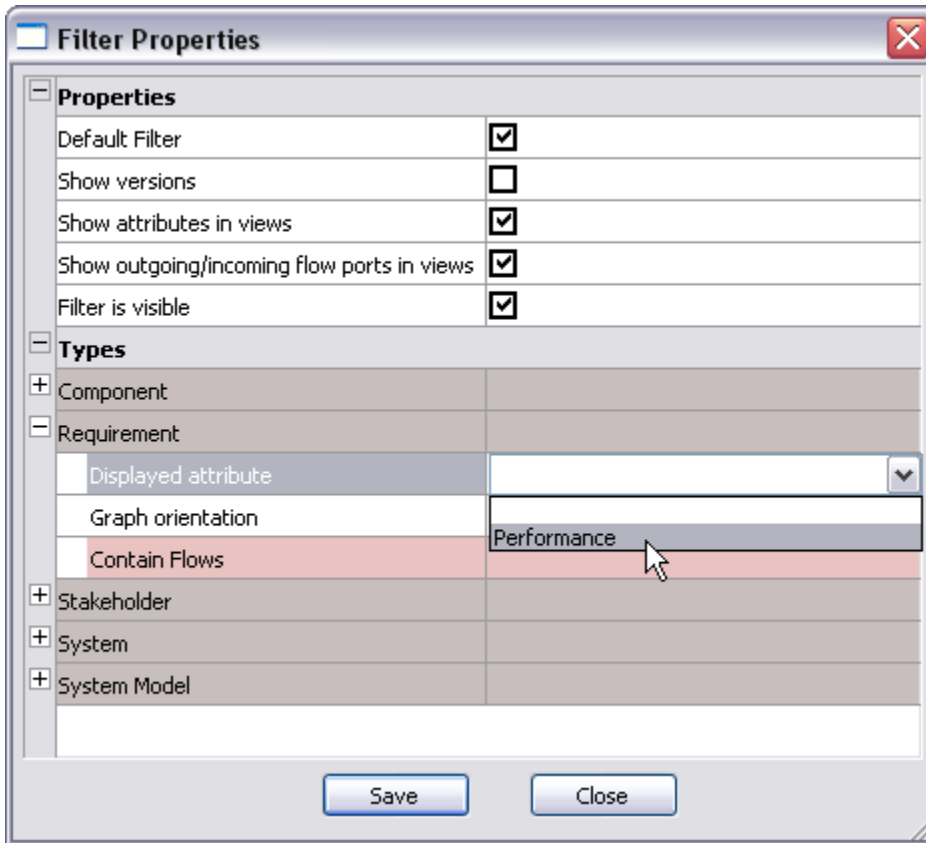

However, not all attribute types can be used in this manner; for instance, it is not possible to display boolean attributes, applications, or files. On the other hand, the following attributes can be displayed in this manner:

- Enumerator
- Number
- Program
- Pointer
- Date
- Object as attribute
- Hyperlink
- Author
- Text



When we substitute the displayed object name by an [attribute value](#); it is often useless to have GUI to fill object name at creation

To avoid this GUI, relative [attribute definition](#) must have a default value